




## Specifications

<b>Weight</b>	Δ 21.9 kg ↘ 21.9 kg
<b>Sizes</b>	Δ S(51)-M(55)-L(59) ↘ S(51)-M(55)-L(59)
<b>Colour</b>	Wrinkle Jeans
<b>Frame</b>	Super smooth welded polished frame with hydroformed tubes of premium alloy. Fully internal shifter, brake and lighting cables, integrated skid plate and rear dropout for flat mount disc brakes and thru axle. Headtube with integrated steering rotation limiter and KOGA Light Design. Integrated rear carrier and mudguard attachment. Advised maximum tire width including mudguard 42mm*
<b>Front fork</b>	KOGA alloy for Disc brake with integrated mudguard attachment and steering limiter
<b>Headset</b>	Industrial bearing - Integrated in frame
<b>Handlebar</b>	KOGA Riser alloy
<b>Stem</b>	KOGA adjustable with integrated cable guidance
<b>Handlebar tape/grips</b>	KOGA Sport
<b>Disc-/Hydraulic brake set (f)</b>	Shimano MT201/UR300 hydraulic disc brake, FM type
<b>Disc-/Hydraulic brake set (r)</b>	Shimano MT201/UR300 hydraulic disc brake, FM type
<b>Rotor front</b>	Shimano RT-54 180mm
<b>Rotor rear</b>	Shimano RT-54 160mm
<b>Internal gear hub</b>	ENVILO CITY
<b>Shift lever (r)</b>	ENVILO TWIST DISPLAY PRO
<b>Chain</b>	GATES CDC
<b>Crank set</b>	KOGA crank arm, GATES CDC front sprocket 52T
<b>Cassette</b>	Gates CDC 24T
<b>Front hub</b>	FORMULA RX-221T 12X100 Thru Axle
<b>Rear hub</b>	ENVILO CITY
<b>Tire (f)</b>	CONTINENTAL CONTACT URBAN 40-622
<b>Tire (r)</b>	CONTINENTAL CONTACT URBAN 40-622
<b>Tube</b>	Schwalbe
<b>Rim (f)</b>	Ryde Andra
<b>Rim (r)</b>	Ryde Andra
<b>Spokes</b>	Sapim Leader
<b>Saddle</b>	Selle Royal Vivo Ergo Sport
<b>Seat post</b>	LightSkin alloy with integrated rear light
<b>Chain guard</b>	BELT GUARD E-F3
<b>Mudguard (f)</b>	KOGA 46 mm
<b>Mudguard (r)</b>	KOGA 46 mm
<b>Headlight</b>	KOGA Light Design E-Bike 2.0
<b>Rear light</b>	LightSkin seat post integrated
<b>Rear carrier</b>	KOGA Urban
<b>Kickstand</b>	Ursus Mooi
<b>Bell</b>	Wiek ebike Black
<b>Ring lock</b>	AXA Victory ART ** Approved
<b>Pedals</b>	KOGA Sole-Mate
<b>Motor</b>	Bosch Performance Line SX
<b>Battery</b>	CompactTube 400
<b>Display set</b>	Purion 200

## Geometry

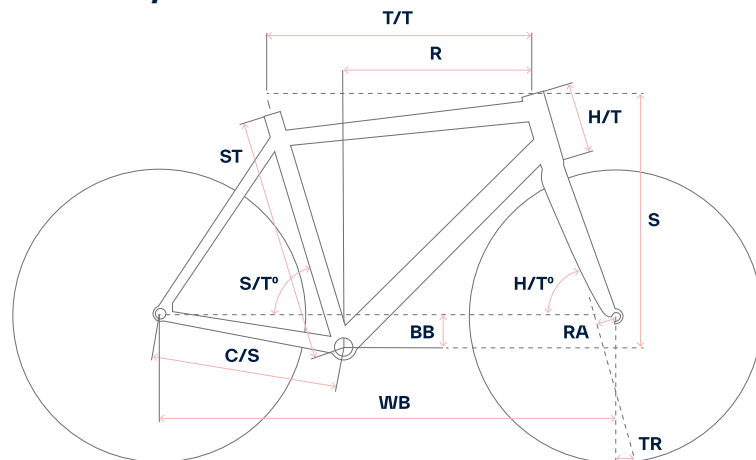

Δ	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
S	510	600	460	1100	60	45	125	72,0	-	70,5	402	608
M	550	615	460	1107	60	45	155	71,0	-	71,5	409	641
L	590	645	460	1122	60	45	185	71,0	-	71,5	415	669

Δ	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
S	510	600	460	1101	60	45	155	72,0	-	70,5	393	637
M	550	620	460	1097	60	45	170	71,0	-	71,5	394	655
L	590	630	460	1107	60	45	185	71,0	-	71,5	400	669