




Specifications

Weight	Δ 21.4 kg ↘ 21.4 kg ↘ 21.4 kg
Sizes	Δ S(51)-M(55)-L(59) ↘ S(51) -M(55)-L(59) ↘ XS(47)-S(51)-M(55)
Colour	Δ Vulcan Black Gloss ↘ Sun Metallic Gloss ↘ Vulcan Black Gloss
Frame	Super smooth welded polished frame with hydroformed tubes of premium alloy. Fully internal shifter, brake and lighting cables, integrated skid plate and rear dropout for flat mount disc brakes and thru axle. Headtube with integrated steering rotation limiter and KOGA Light Design. Integrated rear carrier and mudguard attachment . Advised maximum tire width including mudguard 42mm*
Front fork	KOGA alloy for Disc brake with integrated mudguard attachment and steering limiter
Headset	Industrial bearing - Integrated in frame
Handlebar	KOGA Riser alloy
Stem	KOGA adjustable with integrated cable guidance
Handlebar tape/grips	KOGA Sport
Disc-/Hydraulic brake set (f)	Shimano MT201/UR300 hydraulic disc brake, FM type
Disc-/Hydraulic brake set (r)	Shimano MT201/UR300 hydraulic disc brake, FM type
Rotor front	Shimano RT-54 180mm
Rotor rear	Shimano RT-54 160mm
Shift lever (r)	Shimano CUES 6000
Chain	KMC e10 Turbo EPT
Crank set	KOGA
Cassette	SHIMANO CUES CS-LG400 - 11-39T
Rear derailleur	Shimano CUES U6020 10-speed
Front hub	FORMULA CL-712 12X100 Thru Axle
Tire (f)	Schwalbe Road Cruiser Plus 47-622
Tire (r)	Schwalbe Road Cruiser Plus 47-622
Tube	Schwalbe
Rim (f)	Ryde Rival 21 Disc
Rim (r)	Ryde Rival 21 Disc
Spokes	Sapim Leader
Saddle	Selle Royal Vivo Ergo Sport
Seat post	KOGA alloy 27.2 mm
Chain guard	KOGA E-F3
Mudguard (f)	KOGA 46 mm
Mudguard (r)	KOGA 46 mm
Headlight	KOGA Light Design E-Bike 2.0
Rear light	KOGA Light Design E-Bike 2.0
Rear carrier	KOGA F3 with MIK system
Kickstand	Ursus Mooi
Bell	Witek ebike Black
Ring lock	AXA Victory ART ** Approved
Pedals	KOGA Sole-Mate
Motor	Bosch Performance Line SX
Battery	CompactTube 400
Display set	Purion 200

Geometry

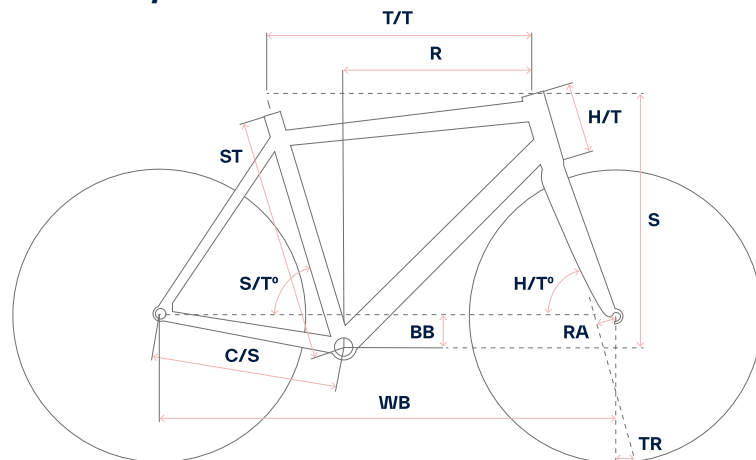

Δ	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
S	510	600	460	1100	60	45	125	72,0	-	70,5	402	608
M	550	615	460	1107	60	45	155	71,0	-	71,5	409	641
L	590	645	460	1122	60	45	185	71,0	-	71,5	415	669

↘	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
S	510	600	460	1101	60	45	155	72,0	-	70,5	393	637
M	550	620	460	1097	60	45	170	71,0	-	71,5	394	655
L	590	630	460	1107	60	45	185	71,0	-	71,5	400	669

↘	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
XS	470	590	460	1091	60	45	140	72,0	-	70,5	388	622
S	510	600	460	1101	60	45	155	72,0	-	70,5	398	622
M	550	620	460	1097	60	45	170	71,0	-	71,5	403	637