


SPECIFICATIONS

WEIGHT	♂ 30.4 kg ♀ 30.2 kg
SIZES	♂ S(47)-M(50)-L(53)-XL(56) ♀ S(47)-M(50)-L(53)-XL(56)
COLOUR	Panther Black/Sienna Red High Gloss
FRAME	Super smooth aluminium frame. Special down tube with Bosch Powertube "SMART SYSTEM" Full integrated cables, integrated headset with steering limiter and MRS rail.
FRONT FORK	Suntour MOBIE35 BOOST suspended front fork, 100mm Travel, 15X110 Thru Axle, with tapered steering tube 1.8 - 15
HEADSET	Industrial bearing - Integrated in frame with steering limiter
HANDLEBAR	KOGA Riser alloy
STEM	KOGA adjustable with integrated cable guidance + SP Connect mount
HANDLEBAR TAPE/GRIPS	KOGA Sport
DISC-/HYDRAULIC BRAKE SET (F)	Shimano MT400 hydraulic disc brake, IS type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano MT400 hydraulic disc brake, IS type
ROTOR FRONT	Shimano RT-56 180mm
ROTOR REAR	Shimano RT-56 160mm
INTERNAL GEAR HUB	Enviolo Trekking
SHIFT LEVER (R)	Enviolo TWIST display PRO
CHAIN	Gates Carbondrive CDX Premium Belt
CRANK SET	KOGA crank arm, GATES CDX front sprocket 48T
CASSETTE	Gates CDX 24T
FRONT HUB	KOGA Disc for BOOST 15x110 Thru Axle
REAR HUB	Enviolo Trekking disc
TIRE (F)	Schwalbe Super Moto-X 62-584
TIRE (R)	Schwalbe Super Moto-X 62-584
TUBE	Schwalbe
RIM (F)	Rodi Tryp30 Disc
RIM (R)	Rodi Tryp30 Disc
SPOKES	Sapim Strong
SADDLE	Selle Royal Vivo Ergo
SEAT POST	KOGA alloy 31.6 mm
CHAIN GUARD	KOGA
MUDGUARD (F)	KOGA 72 mm
MUDGUARD (R)	KOGA 72 mm
HEADLIGHT	KOGA Light Design E-Bike Premium 70 Lux
REAR LIGHT	KOGA Light Design E-Bike rearlight
REAR CARRIER	Racktime frame integrated
KICKSTAND	Pletcher Comp
BELL	Widek ebike Black
RING LOCK	AXA IMENSO L -ART** Approved
PEDALS	KOGA Sole-Mate
PUMP	KOGA Telescopic
MOTOR	Bosch BES3 Performance Line CX "SMART" system
DISPLAY SET	Bosch BES3 KIOX 300 + SMART LED Remote

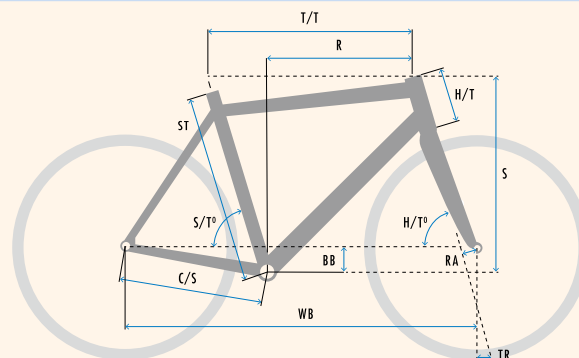

GEOMETRY

♂ GENTS

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
S	470	657	484	1233	55	50	69	74	-	180	470	651
M	505	664	484	1241	55	50	69	74	-	190	475	660
L	535	672	484	1250	55	50	69	74	-	200	480	669
XL	565	682	484	1262	55	50	69	74	-	220	485	688

♀ LADIES

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
S	470	647	484	1223	55	50	69	74	-	180	460	451
M	505	654	484	1231	55	50	69	74	-	190	465	660
L	535	662	484	1240	55	50	69	74	-	200	470	669
XL	565	672	484	1252	55	50	69	74	-	220	475	688