


F3 6.0

SPECIFICATIONS

WEIGHT	♂ 15.2 kg ♀ 15.3 kg ⚡ 15.4 kg
SIZES	♂ 50-54-57-60-63cm ♀ 47-50-53-56-59cm ⚡ 47-50-53-56-59cm
COLOUR	Off Black high gloss
FRAME	Super smooth welded frame. Triple-buttet hydroformed aluminium tubes. Down tube with internal shifter and brake cables, tapered headtube with integrated 1 ¹ / ₈ "/1 ¹ / ₄ " headset, integrated rear carrier and mudguard attachment and excentric bottom bracket.
FRONT FORK	KOGA alloy Feathershock - 30mm travel
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Riser alloy
STEM	KOGA adjustable Oversized
HANDLEBAR TAPE/GRIPS	KOGA Sport
DISC-/HYDRAULIC BRAKE SET (F)	Shimano MT201 hydraulic disc brake, IS type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano MT201 hydraulic disc brake, IS type
ROTOR FRONT	Shimano RT-54 160mm
ROTOR REAR	Shimano RT-54 160mm
INTERNAL GEAR HUB	Shimano Alfine 11
SHIFT LEVER (R)	Shimano Alfine 11
CHAIN	Gates Carbondrive CDX Premium Belt
CRANK SET	Gates Carbondrive FC-S550 CDX
CASSETTE	Gates CDX 24T
FRONT HUB	Shimano Dynamo Hub Nexus 3D37
TIRE (F)	Schwalbe Spicer Plus 40-622
TIRE (R)	Schwalbe Spicer Plus 40-622
TUBE	Schwalbe
RIM (F)	Rodi Airline Corsa Disc
RIM (R)	Rodi Airline Corsa Disc
SPOKES F1	Sapim Strong
SADDLE	KOGA Sports
SEAT POST	KOGA alloy 27.2mm
MUDGUARD (F)	KOGA 46mm
MUDGUARD (R)	KOGA 46mm
HEADLIGHT	B&M Eyc 50 Lux
REAR LIGHT	Spanninga Plateo
REAR CARRIER	Racktime frame integrated
KICKSTAND	Ursus Mooi
BELL	Widek Compact
PEDALS	KOGA Sole-Mate
PUMP	KOGA Telescopic

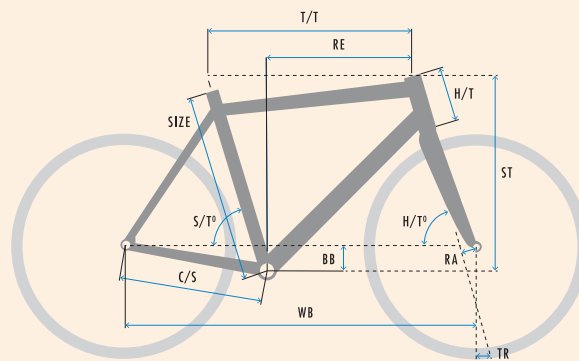

GEOMETRY

♂ GENTS

♂ MIXED

♀ LADIES

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST	SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST	SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
50	575	455	1072	55	45	70.5	72.0	75	115	389	572	47	566	455	1063	55	45	70.5	72.0	75	145	371	601	47	566	455	1063	69	45	70.5	72.0	75	135	369	606
54	590	455	1065	55	45	71.5	71.0	68	135	385	595	50	573	455	1071	55	45	70.5	72.0	75	155	375	610	50	573	455	1071	69	45	70.5	72.0	75	145	373	615
57	605	455	1080	55	45	71.5	71.0	68	155	394	614	53	580	455	1078	55	45	70.5	72.0	75	165	379	619	53	580	455	1078	69	45	70.5	72.0	75	155	377	625
60	620	455	1095	55	45	71.5	71.0	68	180	400	638	56	587	455	1062	55	45	71.5	71.0	68	175	369	633	56	587	455	1055	69	45	71.5	71.0	68	165	367	638
63	635	455	1110	55	45	71.5	71.0	68	210	405	667	59	594	455	1068	55	45	71.5	71.0	68	185	372	643	59	594	455	1062	69	45	71.5	71.0	68	180	369	653