


SPECIFICATIONS

WEIGHT	△ 8.8 kg
SIZES	△ XS(46)-S(49)-M(52)-L(55)-XL(60)
COLOUR	Turquoise metallic
FRAME	Smooth TIG-welded frame. Exclusive hydroformed tubes manufactured in triple-butted aluminium. Equipped with: Tapered head tube with integrated 1/8"/1¼" headset, Internal cables, Press Fit BB, exclusive KOGA dropouts for 12mm thru axle with integrated replaceable rear derailleur hanger and hidden mudguard mounts.
FRONT FORK	KOGA full carbon with 12x100mm dropouts, internal cable routing and hidden mudguard mounts
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Endurance Race - Oversized alloy - Compact shape
STEM	KOGA Carnero Oversized - Lightweight alloy
HANDLEBAR TAPE/GRIPS	KOGA endurance tape - Silicon
DISC-/HYDRAULIC BRAKE SET (F)	ROTOR hydraulic disc brake, flat mount type
DISC-/HYDRAULIC BRAKE SET (R)	ROTOR hydraulic disc brake, flat mount type
ROTOR FRONT	ROTOR 160mm
ROTOR REAR	ROTOR 160mm
CHAIN	ROTOR X12
CRANK SET	ROTOR ALDHU 42T oval for 12-speed
BOTTOM BRACKET	ROTOR
CASSETTE	ROTOR 12 speed - 11-46T
REAR DERAILLEUR	ROTOR hydraulic 12-speed
WHEEL (F)	DT Swiss G1800 Spline with 12x100 Thru Axle
WHEEL (R)	DT Swiss G1800 Spline with 12x100 Thru Axle
TIRE (F)	WTB BYWAY 700X34C
TIRE (R)	WTB BYWAY 700X34C
TUBE	Schwalbe ExtraLight
SADDLE	Selle San Marco Shortfit
SEAT POST	KOGA D-form integrated seat post 27.2mm

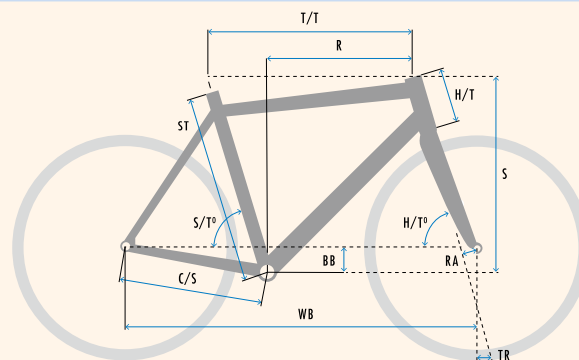

GEOMETRY

△ GENTS

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
XS	460	526	433	1014	67.0	45	71.5	75.0	65	115	387	520
S	490	536	433	1015	67.0	45	72.0	74.5	62	135	386	541
M	520	551	433	1016	67.0	45	72.5	73.5	59	155	385	562
L	550	569	433	1023	67.0	45	73.0	73.0	56	175	391	583
XL	600	589	433	1038	67.0	45	73.0	72.5	56	195	400	602