


	Kimera Road KomForza (KK)
Frame sizes	XS-S-M-L
Frame description	Completely hand-built Smooth TIG-welded frame. Exclusive tapered tubes manufactured in triple-hardened and triple-buttet 6061 aluminium. Equipped with: Tapered head tube with integrated 1 1/8"/1 1/4" headset, Press Fit BB, engraved Koga rear-ends and replaceable rear derailleur hanger.
Front fork	Koga - Carbon/Alloy
Headset	Neco industrial bearing - Integrated in frame
Colour	Snow White Metallic
Handlebar	Koga Oversized alloy - Compact shape
Stem	Koga Carnero Oversized - Lightweight alloy
Handlebar tape	Koga Comfort tape
Brake (front)	Shimano 105
Brake (rear)	Shimano 105
Shift-/Brake lever (r)	Shimano 105
Shift-/Brake lever (l)	Shimano 105
Brake cable	Stainless steel inner cable -Flexible outer cable with PTFE tube for light braking
Shifter cable	Stainless steel inner cable -Flexible outer cable with PTFE tube for light shifting
Chain	KMC X10L
Wheel set	Shimano RS-11
Tires	Vredestein Fiammante DuoComp 25mm - Integrated Protection Layer®
Tube	Vredestein 18/25-622 50 mm valve
Saddle	Koga Comfort Race
Seat post	Koga alloy ø27,2x300mm
Seat clamp	Koga - Alloy
Crank set	Shimano 105 Hollowtech II - Ultralightweight - Hyperdrive chainrings for smooth and precise shifting: 50x39x30T - Black color
Bottom bracket	Shimano Press Fit
Cassette	Shimano 105 10 speed - Hyperglide for quick and smooth shifting - Sprockets: 12-13-14-15-16-17-19-21-23-25T
Rear derailleur	Shimano 105
Front derailleur	Shimano 105
Pump	Koga with alloy barrel - Presta Fit - High Pressure - Ergonomic grip
Bottle	Tacx Source Solid - Easy refill
Bottle holder	Elite Pase
Weight	9.2
Gears	30

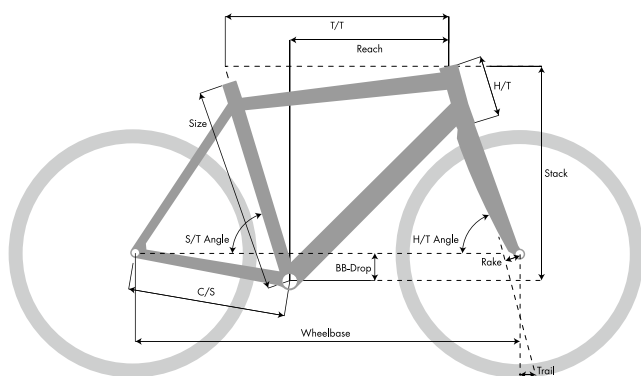

Size	T/T	C/S	Wheelbase	BB-Drop	Rake	H/T Angle	S/T Angle	Trail	H/T	Reach	Stack
XS (46)	520	412	979	67,0	45	71,5	74,5	65	115	377	516
S (49)	532	412	983	67,0	45	72,0	74,0	62	135	377	536
M (52)	547	412	984	67,0	45	72,5	73,0	59	155	377	557
L (55)	565	412	993	67,0	45	73,0	72,5	56	175	383	577