


F3 5.1 S

SPECIFICATIONS

WEIGHT	♂ 15.2 kg ♂ 15.4 kg
SIZES	♂ 47-50-53-56cm ♂ 47-50-53-56-59cm
COLOUR	Ochre matt
FRAME	Smooth welded frame. Triple-buttet hydroformed aluminium tubes. Down tube with internal shifter and brake cables, tapered headtube with integrated 1 1/8"/1 1/4" headset, integrated rear carrier and mudguard attachment and replaceable rear derailleur hanger.
FRONT FORK	KOGA alloy Feathershock - 35mm travel
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Oversized SportTouring alloy
STEM	KOGA Justera adjustable
HANDLEBAR TAPE/GRIPS	KOGA Ergonomic
DISC-/HYDRAULIC BRAKE SET (F)	Shimano M365 hydraulic disc brake, IS type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano M365 hydraulic disc brake, IS type
ROTOR FRONT	Shimano RT-54 160mm
ROTOR REAR	Shimano RT-54 160mm
SHIFT LEVER (R)	Shimano Deore SLX M670
SHIFT LEVER (L)	Shimano Deore SLX M670
CHAIN	KMC X10-93
CRANK SET	Shimano T551 44-32-24T for 10-speed
CASSETTE	Shimano HG-500 10 speed - 11-34T
REAR DERAILLEUR	Shimano Deore SLX M670 10-speed
FRONT DERAILLEUR	Shimano Deore LX T670 for 3x10-speed
FRONT HUB	Shimano Dynamo Hub Nexus 3D37
REAR HUB	Shimano Deore M6000 Disc
TIRE (F)	Schwalbe Spicer 40-622
TIRE (R)	Schwalbe Spicer 40-622
TUBE	Schwalbe
RIM (F)	Mach1 560 Disc
RIM (R)	Mach1 560 Disc
SPOKES F1	Mach1 Plus
SADDLE	Selle Royal Lookin
SEAT POST	KOGA alloy 27.2mm
MUDGUARD (F)	KOGA 46mm
MUDGUARD (R)	KOGA 46mm
HEADLIGHT	B&M Eyc 50 Lux
REAR LIGHT	Spanninga Plateo
REAR CARRIER	Racktime frame integrated
KICKSTAND	Atron Velo Move
BELL	Witek Compact
PEDALS	KOGA Sale-Mate
PUMP	KOGA Telescopic

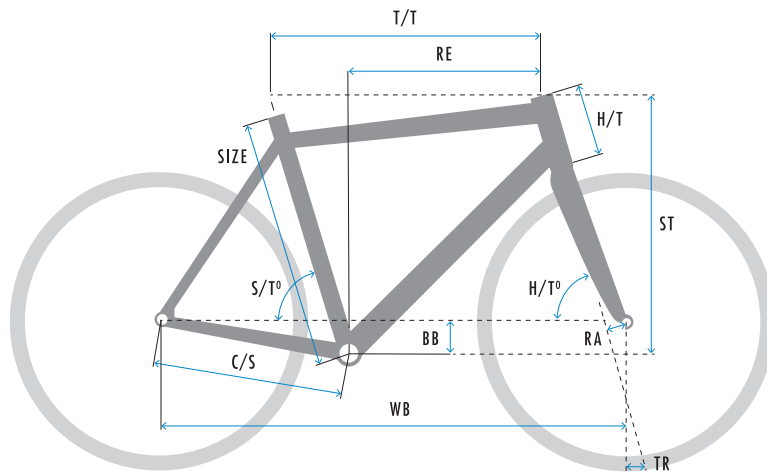

GEOMETRY

MIXED

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
47	566	457	1065	55	45	70,5	72,0	75	145	371	601
50	573	457	1073	55	45	70,5	72,0	75	155	375	610
53	580	457	1080	55	45	70,5	72,0	75	165	379	619
56	587	457	1064	55	45	71,5	71,0	68	175	369	633

LADIES

SIZE	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	RE	ST
47	566	457	1065	69	45	70,5	72,0	75	135	369	606
50	573	457	1073	69	45	70,5	72,0	75	145	373	615
53	580	457	1080	69	45	70,5	72,0	75	155	377	625
56	587	457	1057	69	45	71,5	71,0	68	165	367	638
59	594	457	1064	69	45	71,5	71,0	68	180	369	653