


SPECIFICATIONS

WEIGHT	♂ 16.2 kg ♀ 16.6 kg
SIZES	♂ M(54)-L(57)-XL(60)-XXL(63) ♀ XS(47)-S(50)-M(53)-L(56)-XL(59)
COLOUR	Grafiet Matt
FRAME	Super smooth welded premium 6061 aluminium with replaceable rear derailleur hanger. Fully internal shifter, brake and lighting cables. KOGA Light Design. Integrated headset with steering limiter.
FRONT FORK	KOGA alloy rigid fork with integrated mudguard attachment and steering limiter
HEADSET	Industrial bearing - Integrated in frame
HANDLEBAR	KOGA Riser alloy
STEM	KOGA adjustable with integrated cable guidance
HANDLEBAR TAPE/GRIPS	KOGA Sport
DISC-/HYDRAULIC BRAKE SET (F)	Shimano MT201/UR300 hydraulic disc brake, FM type
DISC-/HYDRAULIC BRAKE SET (R)	Shimano MT201 hydraulic disc brake, FM type
ROTOR FRONT	Shimano RT-30 160mm
ROTOR REAR	Shimano RT-30 160mm
SHIFT LEVER (R)	Shimano Deore T6000
SHIFT LEVER (L)	Shimano Deore T6000
CHAIN	KMC X10-93
CRANK SET	Shimano T520 44-32-24T for 10-speed
BOTTOM BRACKET	Shimano Sealed cartridge Octalink
CASSETTE	Shimano HG-500 10 speed - 12-28T
REAR DERAILLEUR	Shimano Deore XT T8000 10-speed
FRONT DERAILLEUR	Shimano Deore XT T8000 for 3x10-speed
FRONT HUB	Shutter Precision PL-7
REAR HUB	Shimano MT400 Disc
TIRE (F)	Schwalbe Spicer Plus 40-622
TIRE (R)	Schwalbe Spicer Plus 40-622
TUBE	Schwalbe
RIM (F)	Ryde Rival21 Disc
RIM (R)	Ryde Rival21 Disc
SPOKES	Sapim Strong
SADDLE	Selle Royal Vivo Ergo
SEAT POST	KOGA alloy 27.2mm
MUDGUARD (F)	KOGA 46mm
MUDGUARD (R)	KOGA 46mm
HEADLIGHT	KOGA Integrated
REAR LIGHT	KOGA Integrated
REAR CARRIER	KOGA F3 with MIK system
KICKSTAND	Ursus Mooi
BELL	KOGA Compact
RING LOCK	AXA Victory ART ** Approved
PEDALS	KOGA Sole-Mate

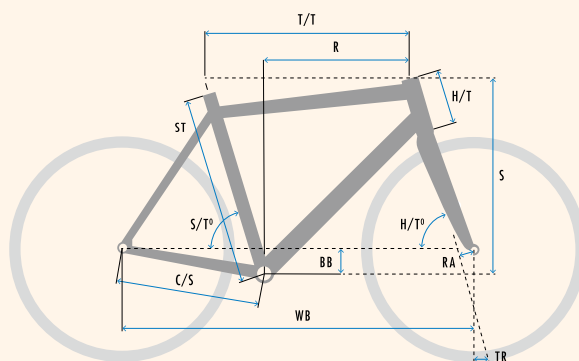

GEOMETRY

♂ GENTS

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
M	540	615	460	1092	60	45	71.5	71	-	140	399	627
L	570	630	460	1107	60	45	71.5	71	-	155	409	641
XL	600	645	460	1122	60	45	71.5	71	-	185	415	669
XXL	630	660	460	1137	60	45	71.5	71	-	200	425	684

♀ LADIES

SIZE	ST	T/T	C/S	WB	BB	RA	H/T°	S/T°	TR	H/T	R	S
XS	470	590	460	1091	60	45	70.5	72	-	140	388	622
S	500	600	460	1101	60	45	70.5	72	-	140	398	622
M	530	610	460	1111	60	45	70.5	72	-	155	403	637
L	560	620	460	1097	60	45	71.5	71	-	170	394	655
XL	590	630	460	1107	60	45	71.5	71	-	185	400	669